



SL650 Open Pluggable Specification

- Lightweight, modular plug-in Windows module
- No requirement for external connection cables
- High processing power for high-end applications
- Compatible Series: STM, UHM, PDM, PDH, PDU, PDX, NB, 65"VW & IFM, IFD, IFX, IFXD, IFC

GENERAL FEATURES

CPU	Intel® Core™ i5-6200U 2 cores, 4 threads 2.5GHz (Up to 2.8 GHz w/ Turbo Boost)
Chipset	Skylake SoC 3MB L3 Cache
Resolution Support	Ultra HD Up to 4096 x 2160 @60Hz
GPU	Intel® HD Graphics 520 DirectX12, OpenGL4.0, OpenCL1.2
Memory	2 x 4 GB SO-DIMM DDR3
Network	LAN: 10/100/1000 Mbps WLAN: 802.11 a/g/n Bluetooth 4.0 4G (optional)
Storage	2.5" 500GB HDD
I/O Ports	1 x RJ45 1 x RS232 3 x USB3.0 1 x USB2.0 1 x VGA out 1 x Mic-In 1 x Lineout 2 x WiFi antenna connector 1 x Power button
Operating System	Windows 10 Pro 64 Bit

ENVIRONMENTAL CONDITIONS

Operating Temperature	0-40°C
Operating Humidity	95%

FEATURES

Main Features	Wake-on-LAN Support, Watchdog Timer
---------------	-------------------------------------

MECHANICAL

Product Dimensions (WxDxH)	180 x 119 x 30 mm
Package Dimensions (WxDxH)	237 x 180 x 59 mm
Product Weight	0.85 kg
Package Weight	1.05 kg


POWER

Voltage, HZ	12~19V
Power Supply	DC-In


CERTIFICATION

Safety	YES
EMC	YES
CE	YES

MECHANICAL DESIGN

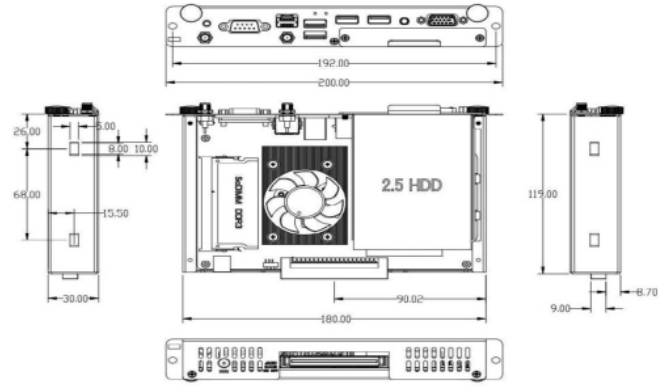

Front Panel External I/O

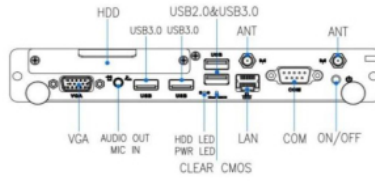

Rear Panel External I/O

